

TERMINATION LUGS




CU TWO HOLE LONG BARREL LUGS

- High Conductivity Seamless Copper Tubing
- Long Barrel Maximises Number of Cripsms
- High Mechanical Strength and Electrical Performance
- Absence of Inspection Hole Prevents Entry of Water and Moisture

Technical Data	
Material	Copper [99.9%]
Plating	Tin Plating
Voltage	1000 V

* Technical Information is Subject to change without notice.

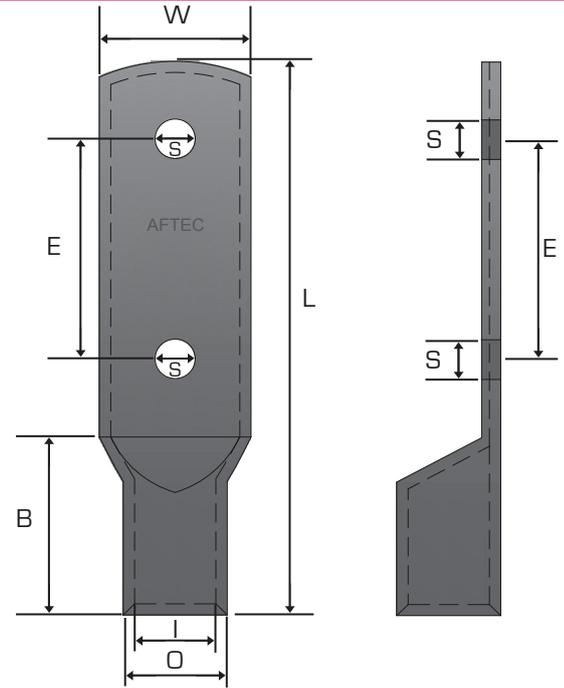

MODEL NO.	WIRE RANGE		DIMENSIONS [mm]						
	mm	AWG	S	E	W	L	B	I	O
ACT 6 - 2H - 6	6	8	6	15.90	12.40	56	21	3.80	5.50
ACT 6 - 2H - 8	6	8	8	15.90	12.40	56	21	3.80	5.50
ACT 6 - 2H - 10	6	8	10	15.90	12.40	56	21	3.80	5.50
ACT 10 - 2H - 6	10	6	6	15.90	12.40	60	22	4.40	7.10
ACT 10 - 2H - 8	10	6	8	15.90	12.40	60	22	4.40	7.10
ACT 10 - 2H - 10	10	6	10	15.90	12.40	60	22	4.40	7.10
ACT 16 - 2H - 6	16	6	6	25.40	22.20	74	25	5.20	7.90
ACT 16 - 2H - 8	16	6	8	25.40	22.20	74	25	5.20	7.90
ACT 16 - 2H - 10	16	6	10	25.40	22.20	74	25	5.20	7.90
ACT 16 - 2H - 12	16	6	12	25.40	22.20	74	25	5.20	7.90
ACT 25 - 2H - 6	25	4	6	25.40	22.20	75	25	6.10	9.50
ACT 25 - 2H - 8	25	4	8	25.40	22.20	75	25	6.10	9.50
ACT 25 - 2H - 10	25	4	10	25.40	22.20	75	25	6.10	9.50
ACT 25 - 2H - 12	25	4	12	25.40	22.20	75	25	6.10	9.50
ACT 35 - 2H - 6	35	2	6	25.40	22.20	78	28	8.00	11.20
ACT 35 - 2H - 8	35	2	8	25.40	22.20	78	28	8.00	11.20
ACT 35 - 2H - 10	35	2	10	25.40	22.20	78	28	8.00	11.20
ACT 35 - 2H - 12	35	2	12	25.40	22.20	78	28	8.00	11.20
ACT 35 - 2H - 14	35	2	14	25.40	22.20	78	28	8.00	11.20
ACT 50 - 2H - 8	50	1	8	25.40	22.20	78	28	9.10	12.80
ACT 50 - 2H - 10	50	1	10	25.40	22.20	78	28	9.10	12.80
ACT 50 - 2H - 12	50	1	12	25.40	22.20	78	28	9.10	12.80
ACT 50 - 2H - 14	50	1	14	25.40	22.20	78	28	9.10	12.80
ACT 50 - 2H - 16	50	1	16	25.40	22.20	78	28	9.10	12.80
ACT 70 - 2H - 8	70	2/0	8	25.40	22.20	87	35	11.20	14.70
ACT 70 - 2H - 10	70	2/0	10	25.40	22.20	87	35	11.20	14.70
ACT 70 - 2H - 12	70	2/0	12	25.40	22.20	87	35	11.20	14.70
ACT 70 - 2H - 14	70	2/0	14	25.40	22.20	87	35	11.20	14.70
ACT 70 - 2H - 16	70	2/0	16	25.40	22.20	87	35	11.20	14.70

*Tolerance Dimension [mm]: Length - ± 0.50 to 1.00., Width - ± 1.25 to 0.75, Thickness - ± 0.50 to 0.25

*Custom Sizes can be developed upon request

TERMINATION LUGS



MODEL NO.	WIRE RANGE		DIMENSIONS [mm]						
	mm	AWG	S	E	W	L	B	I	O
ACT 95 - 2H - 8	95	3/0	8	44.50	22.90	118	35	13.40	17.40
ACT 95 - 2H - 10	95	3/0	10	44.50	22.90	118	35	13.40	17.40
ACT 95 - 2H - 12	95	3/0	12	44.50	22.90	118	35	13.40	17.40
ACT 95 - 2H - 14	95	3/0	14	44.50	22.90	118	35	13.40	17.40
ACT 95 - 2H - 16	95	3/0	16	44.50	22.90	118	35	13.40	17.40
ACT 120 - 2H - 10	120	250 MCM	10	44.50	27.70	126	41	15.10	20.60
ACT 120 - 2H - 12	120	250 MCM	12	44.50	27.70	126	41	15.10	20.60
ACT 120 - 2H - 14	120	250 MCM	14	44.50	27.70	126	41	15.10	20.60
ACT 120 - 2H - 16	120	250 MCM	16	44.50	27.70	126	41	15.10	20.60
ACT 120 - 2H - 20	120	250 MCM	20	44.50	30.20	126	41	15.10	20.60
ACT 150 - 2H - 10	150	300 MCM	10	44.50	30.20	135	50	16.70	22.50
ACT 150 - 2H - 12	150	300 MCM	12	44.50	30.20	135	50	16.70	22.50
ACT 150 - 2H - 14	150	300 MCM	14	44.50	30.20	135	50	16.70	22.50
ACT 150 - 2H - 16	150	300 MCM	16	44.50	30.20	135	50	16.70	22.50
ACT 150 - 2H - 20	150	300 MCM	20	44.50	30.20	135	50	16.70	22.50
ACT 185 - 2H - 10	185	400 MCM	10	44.50	35.20	139	57	19.40	24.20
ACT 185 - 2H - 12	185	400 MCM	12	44.50	35.20	139	57	19.40	24.20
ACT 185 - 2H - 14	185	400 MCM	14	44.50	35.20	139	57	19.40	24.20
ACT 185 - 2H - 16	185	400 MCM	16	44.50	35.20	139	57	19.40	24.20
ACT 185 - 2H - 20	185	400 MCM	20	44.50	35.20	139	57	19.40	24.20
ACT 240 - 2H - 10	240	500 MCM	10	44.50	39.10	146	57	21.30	28.20
ACT 240 - 2H - 12	240	500 MCM	12	44.50	39.10	146	57	21.30	28.20
ACT 240 - 2H - 14	240	500 MCM	14	44.50	39.10	146	57	21.30	28.20
ACT 240 - 2H - 16	240	500 MCM	16	44.50	39.10	146	57	21.30	28.20
ACT 240 - 2H - 20	240	500 MCM	20	44.50	39.10	146	57	21.30	28.20
ACT 300 - 2H - 10	300	600 MCM	10	44.50	43.60	147	57	23.50	31.30
ACT 300 - 2H - 12	300	600 MCM	12	44.50	43.60	147	57	23.50	31.30
ACT 300 - 2H - 14	300	600 MCM	14	44.50	43.60	147	57	23.50	31.30
ACT 300 - 2H - 16	300	600 MCM	16	44.50	43.60	147	57	23.50	31.30
ACT 300 - 2H - 20	300	600 MCM	20	44.50	43.60	147	57	23.50	31.30
ACT 400 - 2H - 10	400	750 MCM	10	44.50	48.30	160	67	26.80	34.80
ACT 400 - 2H - 12	400	750 MCM	12	44.50	48.30	160	67	26.80	34.80
ACT 400 - 2H - 14	400	750 MCM	14	44.50	48.30	160	67	26.80	34.80
ACT 400 - 2H - 16	400	750 MCM	16	44.50	48.30	160	67	26.80	34.80
ACT 400 - 2H - 20	400	750 MCM	20	44.50	48.30	160	67	26.80	34.80
ACT 500 - 2H - 10	500	1000 MCM	10	44.50	48.30	160	67	30.00	39
ACT 500 - 2H - 12	500	1000 MCM	12	44.50	48.30	160	67	30.00	39
ACT 500 - 2H - 14	500	1000 MCM	14	44.50	48.30	160	67	30.00	39
ACT 500 - 2H - 16	500	1000 MCM	16	44.50	48.30	160	67	30.00	39
ACT 500 - 2H - 20	500	1000 MCM	20	44.50	48.30	160	67	30.00	39
ACT 630 - 2H - 10	630	1235 MCM	10	44.50	48.30	160	67	35.00	44.70
ACT 630 - 2H - 12	630	1235 MCM	12	44.50	48.30	160	67	35.00	44.70
ACT 630 - 2H - 14	630	1235 MCM	14	44.50	48.30	160	67	35.00	44.70
ACT 630 - 2H - 16	630	1235 MCM	16	44.50	48.30	160	67	35.00	44.70
ACT 630 - 2H - 20	630	1235 MCM	20	44.50	48.30	160	67	35.00	44.70

*Tolerance Dimension [mm]: Length - ± 0.50 to 1.00., Width - ± 1.25 to 0.75, Thickness - ± 0.50 to 0.25

*Custom Sizes can be developed upon request